

Shrubbler® 360° & 180° Adjustable Flow

The original Shrubbler® with flow adjustment. Flow and coverage can be altered by rotating the click indexed cap.

Features

- Fingertip flow control with shut-off option.
- Spike models anchor Shrubbler® at the plant.
- Spike models suit 4 mm ID micro tube.
- Barb model for direct attachment to micro supply tubing.
- 4 mm threaded model for installation into Rigid Risers, Asta® Stake Adaptors and Micro Stakes.
- 1/2" threaded model for riser pipe installations.



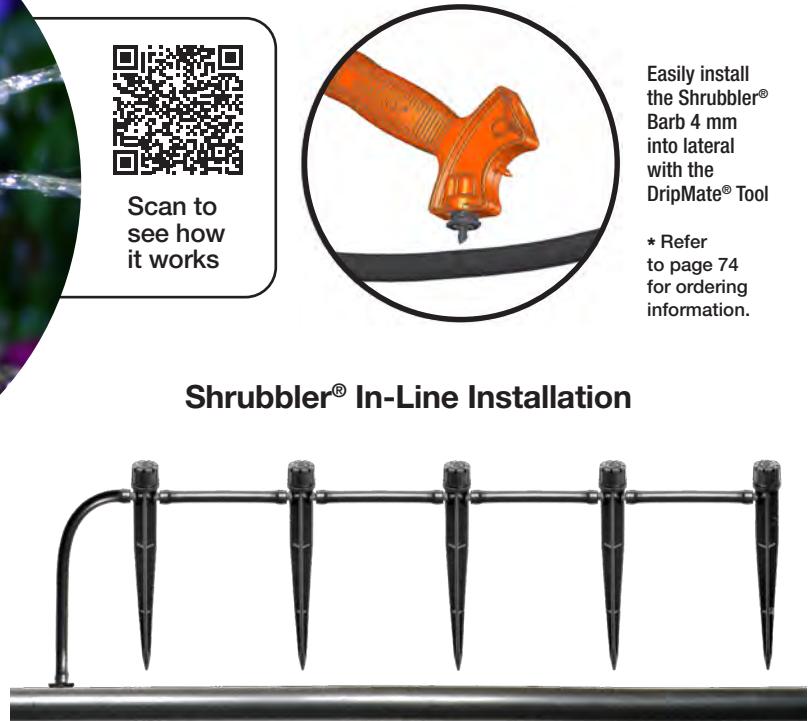
Applications

Pots, tubs, landscaped gardens and nurseries. Ideal for hanging baskets.

In-Line Spike model suitable for planter boxes or narrow garden beds



Shrubbler® Spike
Inlet 4 mm w/
Break Off Adaptor



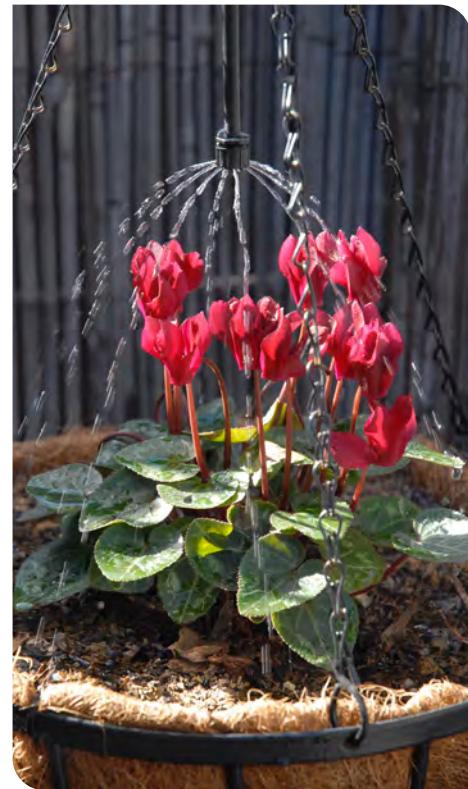
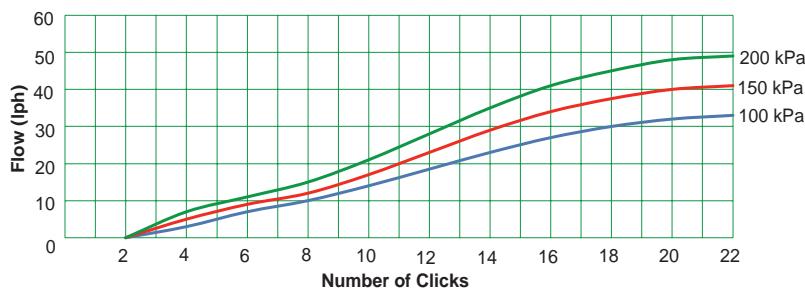
Shrubbler® In-Line Installation

Easily install the Shrubbler® Barb 4 mm into lateral with the DripMate® Tool

* Refer to page 74 for ordering information.

Performance Chart - Fully open (approx. 22 clicks)

Pattern	360° *		180° 不
Pressure (kPa)	Flow (lph)	Diameter (m)	Radius (m)
100	30	0.4	0.4
150	37	0.6	0.5
200	44	0.9	0.6

Flow Rate 360° & 180°**Ordering Information - Shrubbler® 360°**

Base type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Barb 4 mm	31445	100	65	11.5
Thread 4 mm	31415	100	65	14.0
Thread 1/2" FNPT	31425	25	70	8.3
Spike	31495	25	40	6.3
In-Line Spike	30995	25	40	6.3

Ordering Information - Shrubbler® 180°

Base type	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
Barb 4 mm	31245	100	65	11.5
Thread 4 mm	31215	100	65	14.0
Thread 1/2" FNPT	31225	25	70	8.3
Spike	31295	25	40	6.3

Specifications

	Barb	Thread	Thread 1/2"	Spike
UV STABILISED MATERIAL	polypropylene	acetal	polypropylene	polypropylene
BASE CAP	polypropylene	polypropylene	polypropylene	polypropylene
BASE/CONNECTION TYPE: INLET	barb 4 mm	thread 4 mm 10-32 UNF	thread 1/2" FNPT	barb 4 mm

